

DESIGNED TO SUIT YOUR MARKET



CONTENTS

Overview	4
LED Compact Work Lamp	5
Forklift LED Warning Lamp	6
Forklift LED Line Light	7
Colour Change LED Mini Light Bar	8
Heavy Duty Machine LED Lighting	9
6 - 35 Volt LED Pilot Lights	10
LED Beacon	11
Maxi Vision® Forklift Camera System	12
Maxi Vision® Commercial Vehicle Camera Kit	13
Camera System Kits	14
Coolant Level Kits	15
Lockout Lever Kit	16
Connectors	17
Wiring Harness Accessories	18
Terminal and Contact Guide	19







SMART SPECIALISED ELECTRICAL EQUIPMENT BY RCT **AUSPROTEC**

Unit 1-5/511 Abernethy Road Kewdale WA 6105

Ph: +61 (0) 8 9353 6577 Fax: +61 (0) 8 9353 6578

Unit 1/27 Flinders Parade North Lakes QLD 4509 Fax: +61 (0) 7 3385 0173 Ph: +61 (0) 7 3385 0172 BRISBANE

LIGHT

LIGHT

HOLDERS

BASES

24 Percy Road Kalgoorlie WA 6430 Ph: +61 (0) 8 9021 1600 Fax: +61 (0) 8 9091 4927 KALGOORLIE

1A Ryan Road Mt Isa QLD 4825 Ph: +61 (0) 7 4749 0233 Fax: +61 (0) 7 4749 0232

SOUTH AMERICA: +56 9 8731 9925

BEACONS WARNING

III.

CHANGE COLOUR

LIGHT

MONITORS

CAMERA

FORK

IN CABIN



Reliable, affordable lighting for harsh conditions

LED Compact Work Lamp

Representing the latest in high output lighting technology, the AusProTec™ Compact LED work light is robust, powerful and resistant to shock, vibration, dust and moisture.

With solid-state LED construction and a fully sealed housing (rated to IP67), this LED work light takes durability and reliability to the next level.

This work light features rugged and lightweight die-cast alloy housing, stainless steel mounting hardware, and virtually unbreakable polycarbonate optical lenses. Containing 4 x 2.5 watt LED's, this multi voltage unit has a 550 lumen output making it a perfect solution for your compact lighting application.

Specifications

Voltage:	10-52V multi-voltage
Output:	550 lumen (4x 2.5W LEDs)
Current Draw:	0.9A @ 12V 0.4A @ 28V
Dimensions:	66mm (H) x 66mm (W) x 65mm (D)
Beam Pattern:	36° trapezoid
Beam Distance:	37m @ 1 lux







Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577 +27 (0) 83 292 4246 +1 705 590 4001 Africa: Canada: Russia / CIS: +7 (910) 411 11-74 +56 9 8731 9925 South America: USA: +1 801 938 9214



Be safe, be seen, be smart

SmartSpot Forklift LED Warning Light

Keeping up with industry standards, RCT has developed the forklift LED warning light.

Available in blue and red beam, this light is specifically designed to project a visual caution mark onto the floor of your warehouse, alerting nearby people and other machine users that a vehicle is approaching.

Specifications

Voltage	9 - 80 Volts DC
Power	2 x 3 Watt Cree leds
Material	Die cast aluminium housing
Reflector and lens	Poly carbonate
Mounting bracket	Stainless steel
Termination	500mm flying lead
Beam pattern	Spot
Waterproof rating	IP67



12416 SMARTSPOT LED FORKLIFT WARNING LIGHT BLUE



12429 SMARTSPOT LED FORKLIFT WARNING LIGHT RED





Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / ClS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214



Be safe, be seen, be smart

Forklift LED Line Light

Forklifts often operate in high-traffic areas where audible warning sirens and alarms provide little to no impact in busy surroundings.

To combat this problem, RCT has designed the AusProTec™ LED Line Lights to make a visual impact. These state-of-the-art lights, project an exclusion line onto warehouse floors to visually alert personnel that a forklift is in the vicinity.

The AusProTec™ LED Line Lights deliver high-intensity indicators for long-range visibility; creating maximum impact in any indoor applications.

Specifications

Voltage	10 - 80 Volts DC
Power	5 x 3 Watt Cree LEDs
Dimensions	115mm x 85.87mm x 74mm
Material	Die cast aluminium housing
Reflector and lens	Poly carbonate
Mounting bracket	Stainless steel
Termination	500mm flying lead
Waterproof rating	IP67
Hours lifespan	30,000+
Beam pattern	Line

Parts

13442 LED LINE LIGHT 9 - 80VDC BLUE



13444 LED LINE LIGHT 9 - 80VDC RED





Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / CIS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.

© Copyright Remote Control Technologies Pty Ltd.



ONE LIGHT, DUAL OUTPUTS

Colour Change LED Mini Light Bar

The AusProTec™ LED colour change light bar is cleverly designed to make surrounding personnel aware of a machine's status.

A trigger wire will interchange the light from amber to green to convey whether the machine is safe to approach.

The low profile and compact design is ideal for installation on small to medium sized machines.

Features

- Compact in design 165mm long and 44mm high
- 14 flash patterns
- Utilising the latest high output LED technology
- Multi-voltage
- Full 350 degree light dispersion
- Environmentally sealed

Specifications

Voltage	12 - 30 VDC
Maximum Current Draw	3A @ 12 VDC
Flash Patterns	14
Mounting	4 x M5 Bolts
Lens	Polycarbonate
Housing	Aluminium
Cable Length	0.4m
Weight	1kg
Light Source	4 x 4 LED Modules
Flash Colour	Amber / Green
Ingress Protection	IP67
Operating Temperature	-40°C to 60°C

Parts

COLOUR CHANGE LED MIN LIGHT BAR AMBER / GREEN





Discover more www.rct-global.com

sales@rct-global.com

Australia: Africa: Canada: Russia / CIS: South America: USA: +61 (0) 8 9353 6577 +27 (0) 83 292 4246 +1 705 590 4001 +7 (910) 411 11-74 +56 9 8731 9925 +1 801 938 9214



Designed to suit your market

Heavy Duty Machine LED Lighting

The AusProTec Heavy Duty LED machine light is built to exacting standards, with a tough aluminium housing, rated to IP69 and 10G vibration testing this work light is suited to the harshest of operating conditions.

Specifically designed for all applications this multi voltage (9 \sim 48VDC) high quality LED work lamp will offer years of trouble free service. Utilizing state of the art LED design and technology this lighting solution is second to none.

Specifications

Power Output:	24 watt (8 x 3 watt LEDs)	20 watt (4 x 5 watt LEDs)
Lumen Output:	2250 (Theoretical), 1575 (Operating)	1725 (Theoretical), 1200 (Operating)
Voltage:	9 – 48VDC (3.5A to 650mA)	9 - 48VDC (1.2A to 250mA)
Dimensions:	W120mm x H100mm x D80mm	W105mm x H121mm x D85mm
Weight:	1.74kg	1.20kg
Beam:	Wide Flood (60°)	Wide Flood (40°)
Durability:	10G vibration rating	
IP Rating:	IP69	
Connector:	2 pin Deutsch DT series	
Mounting:	Heavy Duty "U" Bracket (single or dual bolt mountable)	Dual hole or single post
Colour:	Black	











Parts

12194 LED LAMP 9 - 48V 24W HEAVY DUTY



12458 LED LAMP MULTI VOLTAGE 20W HEAVY DUTY INCLUDING SINGLE POST MOUNT KIT



Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / ClS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.

© Copyright Remote Control Technologies Pty Ltd.



Reduce your stock holdings and down time today

6 - 32 Volt LED Pilot Lights

The PowerLight™ Multi Voltage LED Pilot Lights have been designed to consolidate all No Load LED's under four easy to use part numbers.

With an operating range of 6-32 volts DC, these units have been specifically designed to operate in the harshest conditions. They are compact in design and are highly resistant to vibration, dust and moisture.

Their reliability helps to eliminate costly downtime caused by the regular replacement of standard incandescent globes, often used as indicators. LED pilot lights are far more tolerant to changes in voltage and voltage spikes.

Please Note: If a loaded LED Pilot Light is required (for alternator excitation) a resistor assembly needs to be applied across the power and ground.

Features

- Operating Range: 6 32 Volts DC
- Current Draw: 20ma @ 12 VDC, 22ma @ 24 VDC
- Minimum Start to Glow: 2.79 VDC
- Bi-directional polarity
- · Available in Red, Blue, Green and Yellow
- Modern Illumination
- 6.3mm spade termination
- Fully encapsulated and vibration resistant
- No internal filament extending operating life and reducing downtime
- Cost effective replacement for standard pilot lights

Specifications

Thread diameter:	16mm
Fits hole diameter:	17-20mm
Spade terminal:	6.3mm
Fits panel thickness:	up to 20mm



Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / ClS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.

© Copyright Remote Control Technologies Pty Ltd.



Powerful and reliable rotating warning lamp

LED Beacon

The AusProTec™ LED Beacon combines the latest in electronic design & state of the art engineering technologies.

Constructed of a rugged die-cast base with high impact clear polycarbonate lens this unit is designed to withstand the toughest environmental conditions.

Eliminating the need to replace globes or strobe tubes the AusProTec™ LED Beacon is a cost effective, low maintenance solution to your lighting needs.

Features

- 24 illuminating high intensity multivoltage LEDs
- 12 horizontal facing LED's with wide angle optics
- 12 vertical facing directional LED's
- Waterproof & shock resistant potted circuit board
- Black powder coated die-cast alloy base
- 3 bolt fixings
- 30 flash patterns including 4 simulated rotating patterns
- Alternate or simultaneous flash patterns with up to eight connected LED beacons

Specifications

Dimensions:	114.3mm (H) x 165.1mm (D)
Voltage:	Multivoltage 10V – 30V DC
Current Draw:	1.2 Amp
Warranty:	5 Year on LED
Light intensity:	SAE J845, class 1

Parts

10320	LED ROTATING BEACON BLUE MULTI VOLTAGE	
10341	LED ROTATING BEACON GREEN MULTI VOLTAGE	
10870	LED ROTATING BEACON RED MULTI VOLTAGE	
6231	LED ROTATING BEACON AMBER MULTI VOLTAGE	



Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / CIS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214



Clear vision reduces product damage costs

Maxi Vision® FORKLIFT CAMERA SYSTEM

The AusProTec™ Maxi Vision® Camera systems offer forklift operators a new perspective on driving and operating their equipment. The camera systems are designed to enhance safety by improving the operator's vision when performing such tasks as lifting, transporting loads or reversing the forklift. The systems are suitable for use on small or large forklift trucks, battery or I/C models.

The AusProTec™ Maxi Vision® range of colour LCD monitor and camera options are robust in design and are ideally suited to industrial equipment. Heavy duty casing and mounting options are also available to suit custom applications.

The camera system has been designed to suit forklifts and includes pulleys, heavy duty cabling, special mounting and fittings to enable reliable installation to most electrical and IC forklifts.

So look forward to a safer view on forklift safety whilst improving productivity!

Features

- Multiple camera options available
- Customised systems available on request
- 12/24V application (out of box)
- Simple to use, reliable in operation and easy to maintain
- Compatible with small or large forklifts
- Clear vision whilst lifting, transporting loads and reversing
- Local supply and national support
- Industry proven reliability

Parts

10234 CONVERTER DC TO DC 30/60V WITH FLY



6660

FORKLIFT MAST CAMERA SYSTEM (SUITS 2 AND 3 STAGE MASTS) OPEN CAB IP67









Discover more www.rct-global.com

sales@rct-global.com

Australia: Africa: Canada: Russia / CIS: South America: USA: +61 (0) 8 9353 6577 +27 (0) 83 292 4246 +1 705 590 4001 +7 (910) 411 11-74 +56 9 8731 9925

A: +1 801 938 9214



Reduce the risk of an accident

Maxi Vision® Commercial Vehicle Camera Kit

Safety is a priority for successful operations, many of which include a number of commercial vehicles. A clear view to the front, rear and side of the vehicle, reduces the risk of an accident while in operation on site.

RCT's NEW Maxi Vision® Commercial Vehicle Camera Kits have been developed to assist in the safe operation of commercial vehicles across a range of industries such as Logistics, Transport, Rigid Truck, Refuse, Bus, Rail and Construction.

The kits include a high quality, durable and light weight camera with mounting and cables and a Maxi Vision® Monitor. The system can be added to an existing vehicle simply and easily or retrofitted as required.

The Maxi Vision® Monitor is a high quality, low cost, sturdy monitor ideally suited to application in a commercial vehicle. Up to 4 cameras can be accommodated by the specifically designed cable system with a reduced loom size and strip and tined flying lead for simple power input. Images from the cameras can be viewed by means of a split or full screen view on the monitor.

Significant savings are realised with no labour requirement for maintenance and repair, and "plug and play" fitment for new installations.

Features

- 1/4 Sony super HAD colour CCD for a clearer camera picture
- Built in audio on both camera and monitor for increased safety
- Built in heater in camera for use in extreme, cold conditions
- Die cast casing to protect the camera
- Waterproof camera (IP65), for use in inclement weather conditions
- Multi voltage (12 and 24 volt) monitor to suit any vehicle make or model
- Auto Dim function on monitor for easy viewing in changing light conditions
- Stainless steel mounting and cover for durability in tough conditions
- Touch screen control of monitor with remote control options
- Small in size, light weight and rugged









Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / CIS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214



Maintaining clear vision day or night! Look forward to a new rear vision

CAMERA SYSTEM KITS

The Maxi Vision® camera systems offer machine operators a new perspective on driving and operating their equipment. The range of single and multiple camera systems provide end users with different choices on the best camera system set up to suit their application.

The AusProTec™ Maxi Vision® range of colour LCD monitor and camera options are robust in design and are ideally suited to industrial and mining applications. Heavy duty casing and mounting options are also available to suit custom applications.

Widen your view towards machine safety and productivity.

Components & accessories

Refer to camera kits and components guide

Custom camera kits to suit specific applications available on request.

Components differ between kits. Refer to the camera kits and components guide for full components details.



Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / CIS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only. © Copyright Remote Control Technologies Pty Ltd.



Help prevent premature engine failure

COOLANT LEVEL KITS

The Muirhead® Coolant Level kits are designed to monitor engine coolant levels on motor powered equipment to prevent premature engine failure.

In the event of a blown hose or cracked seal, most engine temperature gauges and protection systems will not detect loss of coolant fluid. This is due to the fact that gauges and temperature switches rely on sensing the coolant temperature and when there is no coolant, the gauges cannot sense the temperature.

The Muirhead® Coolant Level kits eliminate these concerns by warning the operator that the coolant has reached a dangerously low level. This warning allows the operator enough time to take preventative action before major engine damage occurs.

Features

- Slosh timer to prevent false triggering
- Hermetically sealed
- AC probe circuit (reduces electrolysis)
- Inbuilt diagnostics
- Audible and visual warnings
- Reduces premature engine failure and costly engine repairs
- Extends service hours of equipment
- Extends engine and equipment component life
- Keeps operator aware of coolant fluid levels

Parts









Discover more www.rct-global.com

sales@rct-global.com

Australia: +61 (0) 8 9353 6577
Africa: +27 (0) 83 292 4246
Canada: +1 705 590 4001
Russia / ClS: +7 (910) 411 11-74
South America: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.

© Copyright Remote Control Technologies Pty Ltd.

Refer: SBMH1204004



LOCKOUT LEVER KIT

The AusProTec™ Lockout Lever kit is designed to allow machine operators to lock their vehicle's power supply in the OFF position using a padlock device.

The lockout lever kit is commonly used to prevent unnecessary accidents whilst a machine is being serviced. Accidental starting may cause personal injury or property damage. The lockout lever kit also acts as an anti-theft device preventing the machine's engine from being started whilst locked in the OFF position. A simple, yet effective device in maintaining equipment safety and security.

The lockout lever kit suits the AusProTec[™] Isolator switch, Part No. 1700. A pre-assembled kit containing both the lockout lever kit and isolator switch is also available, Part No. 0041.


The lockout lever kit is recommended for use with padlocks with a 7mm diameter shackle.











Switch in OFF position (can be secured in this position with a padlock)

Discover more: rct-global.com

sales@rct-global.com

AUSTRALIA: +61 8 9353 6577
AFRICA: +27 83 292 4246
CANADA: +1 705 590 4001
RUSSIA / CIS: +7 (910) 411 11-74
SOUTH AMERICA: +56 9 8731 9925
USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.
© Copyright Remote Control Technologies Pty Ltd.



CONNECTORS

DEUTSCH DT SERIES

A single contact system terminates all Deutsch connectors. The more widely used DT series connectors are manufactured from an impact resistant thermoplastic that withstands operating temperatures of +125°C. Utilising integral silicone wire seals, they require no further sealing once connected.

- Rugged thermoplastic housing
- Available in 2>12 contact
- Silicone seals
- Contact rating DT series 13 amps
- Hand insertable/removable contacts
- Integral connector latch and wire seals

MILITARY STYLE


MS series connectors incorporate a threaded coupling, single keyway with 1 to 104 contact configuration. These connectors were originally designed for aircraft but are now used in many other fields. They are particularly suitable for commercial applications requiring sealed, heavy duty and reliable connectors.

- Stocked in 1>48 contact
- Environmentally sealed "E" series inserts
- Brass or copper alloy contacts
- Plugs available in straight or 90°
- Dust caps available for plugs and receptacles

SURE-SEAL CONNECTORS

RCT stocks a range of Sure-Seal electrical connectors, ideal for repairs on machines where a corrosion resistant repair is required.

- Available in 1>10 contact
- Blocking contact available
- Easy fitment
- Universal applications

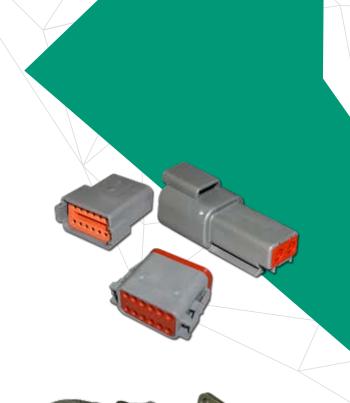





Discover more: rct-global.com

sales@rct-global.com

AUSTRALIA: +61 8 9353 6577
AFRICA: +27 83 292 4246
CANADA: +1 705 590 4001
RUSSIA / CIS: +7 (910) 411 11-74
SOUTH AMERICA: +56 9 8731 9925
USA: +1 801 938 9214



All Applications Covered

WIRING HARNESS ACCESSORIES

ELECTRICAL TAPE

Nitto adhesive PVC electrical tape (lead free).

Available in 19mm x 20m only.



SLIPRY LOOB

Slipry Loob is a waxed base product used in the manufacture of wiring harnesses. This non-toxic environmentally safe product is usually injected into the conduit to assist in pulling the wire through.



CABLE TIES

Cable ties made from nylon 6/6 weather resistant UV protection nylon.



CABLE TIE MOUNTS

UV approved nylon self adhesive cable tie mounts are designed to support lightweight wire bundles.



P-CLAMPS

Made from PVC coated steel available in sizes from 5mm-28mm (closed size ID).



RCT also stock a large range of electrical connectors and tools including Deutsch and Cannon style connectors.

FLEXIBLE SLEEVING

PVC sleeving is an effective product to protect cables and wires from abrasion.

25m rolls



PVC CONDUIT

Thick walled. Flexible PVC black conduit.

Available in 6mm to 32mm with pull wire fitment for sizes 16mm and above.



POLYFLEX

Made from polyamide 6, flexible high impact resistance, flame retardant and UV resistance.

50m rolls



DWL RESIN HEATSHRINK

Adhesive lined, dual wall crosslinked polyolefin heatshrink features 3:1 shrink ratio. The hot melt adhesive liner bonds to a wide variety of materials.

1.2m lengths



SRGS SLEEVING

Silicone elastomer coated braided glass insulating sleeving (SRGS).

Temperature range:

-60°C to 250°C.

180°C continuous.



Discover more: rct-global.com sales@rct-global.com

AUSTRALIA: +61 8 9353 6577

AFRICA: +27 83 292 4246

CANADA: +1 705 590 4001

RUSSIA / CIS: +7 (910) 411 11-74

SOUTH AMERICA: +56 9 8731 9925

USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.

© Copyright Remote Control Technologies Pty Ltd.



Terminal and Contact Guide

Special application crimp terminals and insulators: use crimper Part No. 2639



Part No. 0513 Terminal brass lanced female 6.3mm spade



Part No. 0817



Part No. 0809



Part No. 7621 Terminal to suit coolant level probe 2006



Part No. 8145



Part No. 1152 Terminal flag non-insulated female 6.3mm



Part No. 7321 Insulator to suit 1152 flag terminal

Red insulated crimp terminals: use crimpers Part No. 9881 & 7827



Part No. 9142 Terminal eye insulated red 6.6mm



Part No. 9063



Part No. 0820 Terminal red fully insufemale 6.3mm spade



Part No. 0824 Terminal eye insulated blue 4.2mm



Part No. 0825 Terminal eye insulated blue 4.8mm



Part No. 0826 Terminal eye insulated blue 6.6mm



Part No. 1006 Terminal eye insulated blue 10.5mm







Blue insulated crimp terminals:

use crimpers Part No. 9881 & 7827



Part No. 0821



Part No. 9119

Yellow insulated crimp terminals: use crimpers Part No. 9881 & 7827



Part No. 0853 Terminal eye insulated yellow



Part No. 1005 Terminal eye insulated yellow



Part No. 0827 Terminal eye insulated yellow



Part No. 0828 Terminal eye insulated yellow 6.6mm



Terminal eye insulated yellow 8.2mm



Terminal eye insulated yellow 10.0mm



Terminal eye insulated yellow



Terminal inlin joiner yellow



Terminal yellow fully insulated female

Deutsch plug contacts: use crimpers Part No. 8892, 3186, 4381 & 6022



Part No. 0529 Contact pin No. 20 to suit 3mm2 cable



Part No. 8977 No. 20 to suit 3mm² cable



Part No. 2095 Contact pin No. 16 to suit FVT cable



No. 16 to suit FVT cable

Part No. 5682 Contact pin No. 16 to suit 4mm² cable



Part No. 8934 to suit 4mm 2cable



Part No. 2077 Contact pin No.12 to suit 5mm²cable



Part No. 0552 Contact socket No. 12 to suit 5mm² cable



Contact pin No. 8 to suit 6mm² cable



Discover more: rct-global.com

sales@rct-global.com

AUSTRALIA: +61 8 9353 6577 AFRICA: +27 83 292 4246 CANADA: +1 705 590 4001 RUSSIA / CIS: +7 (910) 411 11-74 SOUTH AMERICA: +56 9 8731 9925 USA: +1 801 938 9214

Disclaimer: Images for illustration purposes only.
© Copyright Remote Control Technologies Pty Ltd.



Discover more: rct-global.com

sales@rct-global.com

AUSTRALIA: +61 8 9353 6577
AFRICA: +27 83 292 4246
CANADA: +1 705 590 4001
RUSSIA / CIS: +7 (910) 411 11-74
SOUTH AMERICA: +56 9 8731 9925
USA: +1 801 938 9214

